


VM multi axis spring and wire forming cell

<http://www.whitelegg.com/products/wire-forming/spring-and-wireform-machinery/vm-multi-axis-spring-and-wire-forming-cell-040c161c-33e4-43e5-ab1f-ca8fa1d4caa2>

Fast and flexible production cell drastically reduces production costs and secondary operations for spring wire up to 4.0 mm. For all torsion spring manufacturing and forming requirements

- High speed production
- Unique high speed wire rotation system with centre of gravity at the centre of revolution
- Quill in/out function with 60 mm of movement. Quill has a depth of 120 mm.
- Split slide table with top and bottom slide holders having +/- 20 mm right and left movement on VM-26 and +/- 53 mm side to side on VM-40
- 5 additional axis available for greater wire forming possibilities
- 0.001 degree axis resolutions provide the best accuracy
- VM-26 for wire range 1.0 - 2.6 mm spring steel
- VM-40 for wire range 0.6-4.0 mm spring steel
- Windows based control system
- Vibration free operation with low inertia systems
- Maximum 16 axis
- One 2 axis spinner and one single axis spinner supplied as standard
- See these video links below:

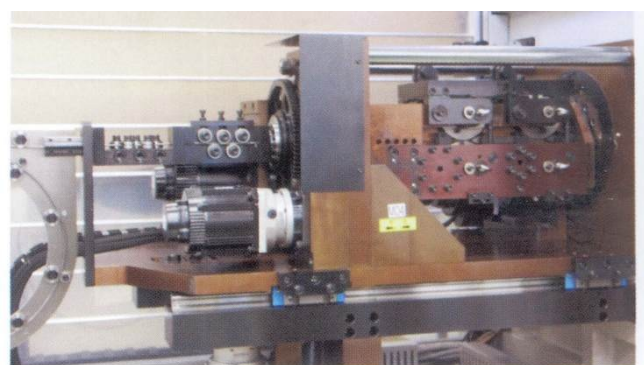

Feed unit revolving portion




<https://youtu.be/P6UznU23xwM>

<https://youtu.be/xDBaRY3L15o>

<https://www.youtube.com/watch?v=dvzyhLbf1IQ>

<https://www.youtube.com/watch?v=jsZt-7S3lvE>

https://www.youtube.com/watch?v=In0tC_1D0MU

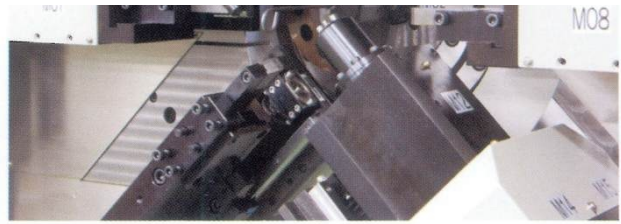

Upper/Lower tables travel 40mm from side to side
Quill travels 60mm back-and-forth