
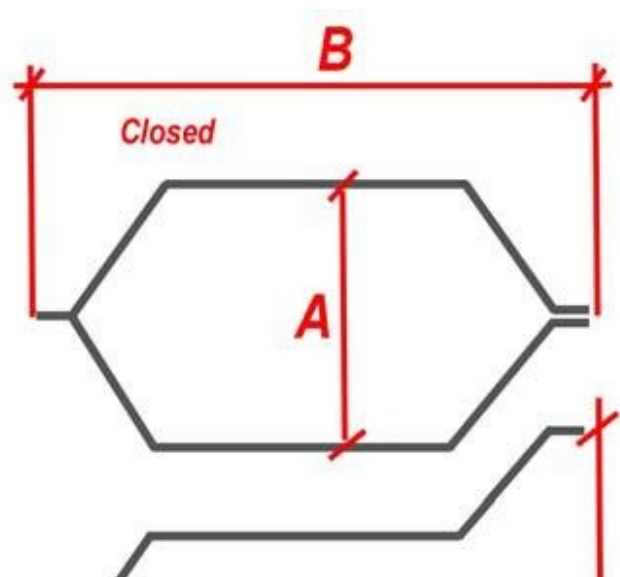



# MCS-100 manual coil spreading/forming for open and closed coils

<http://www.whitelegg.com/products/electric-motor/electric-motor-rewind-and-repair/mcs-100-manual-coil-spreading-forming-for-open-and-closed-coils>

**Designed for the manual production of open or closed coils with quick position tooling for fast and accurate set up.**

- Simple and versatile
- Very quick adjustments of coil size and bending angles

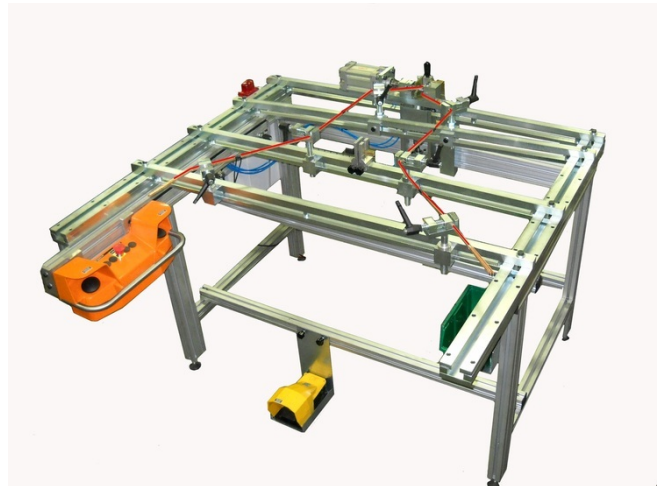

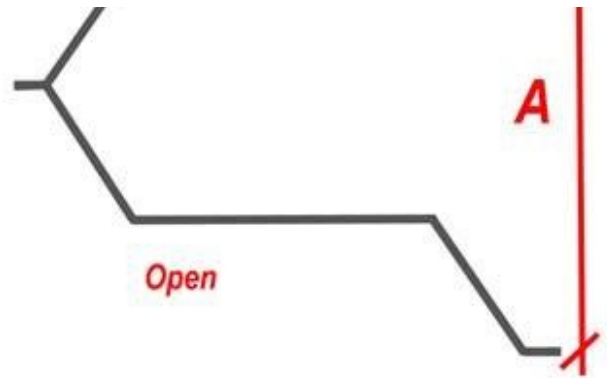

Coil eye inside diameter	6-30 mm
Coil dimension 'A'	150 - 1000 mm
Coil dimension 'B'	350 - 1200 mm
Maximum coil cross section	12 x 3 mm x 3 conductors (108 mm sq)
Dimensions	1400 x 1400 x 1100 mm ( L x W x H)
Weight	250 kg
Power supply	230 V single phase plus 6 bar pneumatic supply

